



Features

- Single-Supply Operation from +2.5V ~ +5.5V
- Rail-to-Rail Output
- -3dB Bandwidth(G=+1): 250MHz (Typ)
- Low Input Bias Current: 1pA (Typ)
- Quiescent Current: 2.8mA/Amplifier (Typ)
- Operating Temperature: -40°C ~ +125°C

- **Small Package:**
MA8051 Available in SOT23-5 and SC70-5 Packages
MA8052 Available in SOP-8,MSOP-8 and DFN-8
Packages
MA8054 Available in SOP-14 and TSSOP-14
Packages MA8051N Available in SOT23-6 and
SC70-6 Packages MA8052N Available in MSOP-
10 Packages


General Description

The MA8051/1N(single), MA8052/2N(dual), MA8054(quad) are rail-to-rail output voltage feedback amplifiers offering ease of use and low cost. They have bandwidth and slew rate typically found in current feedback amplifiers. All have a wide input common-mode voltage range and output voltage swing, making them easy to use on single supplies as low as 2.5V. Despite being low cost, the MA805X series provide excellent overall performance. They offer wide bandwidth to 250MHz ($G = +1$) along with 0.1dB flatness out to 52MHz ($G = +2$) and offer a typical low power of 2.8mA/amplifier.

The MA805X series is low distortion and fast settling make it ideal for buffering high speed A/D or D/A converters. The MA8051/2N has a power-down disable feature that reduces the supply current to 50 μ A. These features make the MA8051/2N ideal for portable and battery-powered applications where size and power are critical. All are specified over the extended -40°C to +125°C temperature range.

Applications

- Imaging
- Photodiode Preamp
- DVD/CD
- Filters
- Professional Video and Cameras
- Hand Sets
- Base Stations
- A-to-D Driver

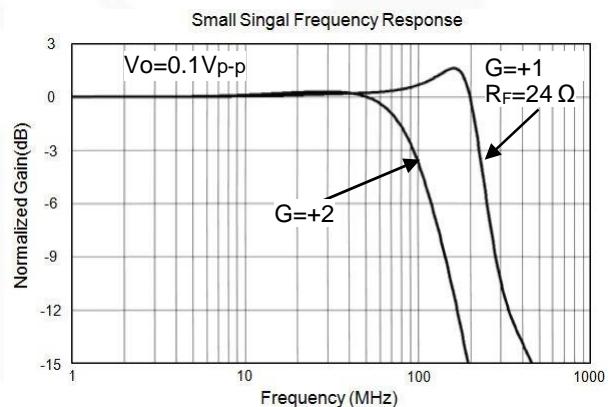



Pin Configuration

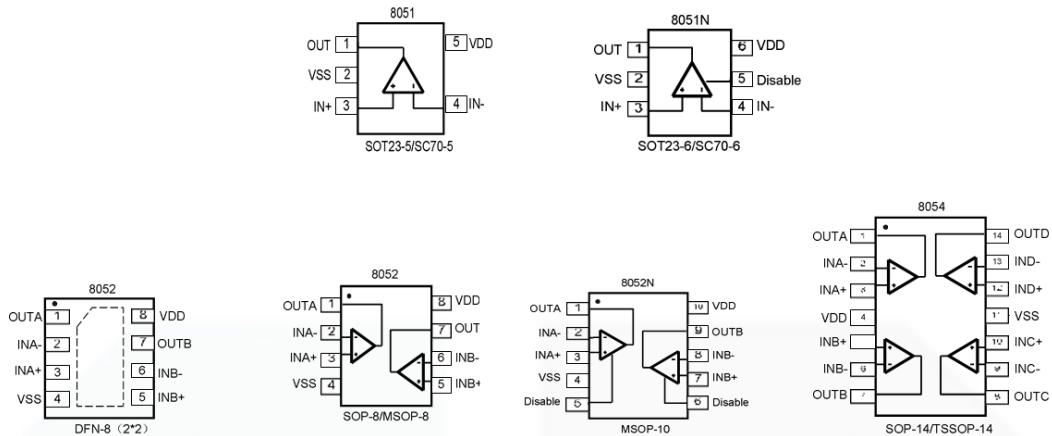


Figure 1. Pin Assignment Diagram

Absolute Maximum Ratings

Condition	Min	Max
Power Supply Voltage (V_{DD} to V_{SS})	-0.5V	+7.5V
Analog Input Voltage (IN+ or IN-)	$V_{SS}-0.5V$	$V_{DD}+0.5V$
PDB Input Voltage	$V_{SS}-0.5V$	+7V
Operating Temperature Range	-40°C	+125°C
Junction Temperature		+160°C
Storage Temperature Range	-55°C	+150°C
Lead Temperature (soldering, 10sec)		+260°C
Package Thermal Resistance ($T_A=+25^\circ C$)		
SOP-8, θ_{JA}		125°C/W
MSOP-8, θ_{JA}		216°C/W
SOT23-5, θ_{JA}		190°C/W
SOT23-6, θ_{JA}		190°C/W
SC70-5, θ_{JA}		333°C/W
SC70-6, θ_{JA}		333°C/W
ESD Susceptibility		
HBM		6KV
MM		400V

Note: Stress greater than those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions outside those indicated in the operational sections of this specification are not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.



MA8051/8052/8054/8051N/8052N

250MHz CMOS Rail-to-Rail Output Opamps

Package/Ordering Information

MODEL	CHANNEL	ORDER NUMBER	PACKAGE DESCRIPTION	PACKAGE OPTION	MARKING INFORMATION
MA8051	Single	MA8051-CR	SC70-5	Tape and Reel,3000	8051
		MA8051-TR	SOT23-5	Tape and Reel,3000	8051
MA8052	Dual	MA8052-SR	SOP-8	Tape and Reel,4000	MA8052
		MA8052-MR	MSOP-8	Tape and Reel,3000	MA8052
		MA8052-FR	DFN-8	Tape and Reel,3000	MA8052
MA8054	Quad	MA8054-TR	TSSOP-14	Tape and Reel,3000	MA8054
		MA8054-SR	SOP-14	Tape and Reel,2500	MA8054
MA8051N	Single With shutdown	MA8051N-CR	SC70-6	Tape and Reel,3000	8051N
		MA8051N-TR	SOT23-6	Tape and Reel,3000	8051N
MA8052N	Dual With shutdown	MA8052N-MR	MSOP-10	Tape and Reel,2500	MA8052N



Electrical Performance Characteristics

(G= +2, R_F=887Ω, R_G=887Ω, and R_L=150Ω connected to V_S/2, unless otherwise noted. Typical values are at T_A =+25°C.)

PARAMETER	CONDITIONS	MA8051/52/54/51N/52N						
		TYP	MIN/MAX OVER TEMPERATURE					
		+25°C	+25°C	0°C to 70°C	-40°C to 85°C	-40°C to 125°C	UNITS	MIN/ MAX
DYNAMIC PERFORMANCE								
-3dB Small Signal Bandwidth	G = +1, V _O = 0.1V p-p, R _F = 24Ω, R _L = 150Ω	180					MHz	TYP
	G = +1, V _O = 0.1V p-p, R _F = 24Ω, R _L = 1kΩ	250					MHz	TYP
	G = +2, V _O = 0.1V p-p, R _L = 50Ω	55					MHz	TYP
	G = +2, V _O = 0.1V p-p, R _L = 150Ω	93					MHz	TYP
	G = +2, V _O = 0.1V p-p, R _L = 1kΩ	122					MHz	TYP
	G = +2, V _O = 0.1V p-p, R _L = 10kΩ	130					MHz	TYP
Gain-Bandwidth Product	G = +10, R _L = 150Ω	115					MHz	TYP
	G = +10, R _L = 1kΩ	150					MHz	TYP
Bandwidth for 0.1dB Flatness	G = +2, V _O = 0.1V p-p, R _L = 150Ω, R _F = 887Ω	52					MHz	TYP
	G = +1, 2V Output Step	77/-151					V/μs	TYP
Slew Rate	G = +2, 2V Output Step	88/-119					V/μs	TYP
	G = +2, 4V Output Step	93/-131					V/μs	TYP
	G = +2, V _O = 0.2V _{p-p} , 10% to 90%	4.5					ns	TYP
Rise-and-Fall Time	G = +2, V _O = 2V _{p-p} , 10% to 90%	18					ns	TYP
	G = +2, 2V Output Step	50					ns	TYP
Settling Time to 0.1%	V _{IN} = G = +VS	18					ns	TYP
Overload Recovery Time								
NOISE/DISTORTION PERFORMANCE								
Input Voltage Noise	f = 1MHz	4.9					nV/Hz	TYP
Differential Gain Error (NTSC)	G = +2, R _L = 150Ω	0.03					%	TYP
Differential Phase Error (NTSC)	G = +2, R _L = 150Ω	0.08					degree	TYP
DC PERFORMANCE								
Input Offset Voltage (V _{os})		±2	±8	±8.9	±9.5	±9.8	mV	MAX
Input Offset Voltage Drift		2					μV/°C	TYP
Input Bias Current (I _B)		1					PA	TYP
Input offset Current (I _{os})		2					PA	TYP
Open-Loop Gain (A _{OL})	V _O = 0.3V to 4.7V, R _L = 150Ω	80	75	74	74	73	dB	MIN
	V _O = 0.2V to 4.8V, R _L = 1kΩ	104	92	91	91	80	dB	MIN
INPUT CHARACTERISTICS								
Input Common-Mode Voltage Range (V _{CM})		-0.2 to +3.8					V	TYP
Common-Mode Rejection Ratio (CMRR)	V _{CM} = -0.1V to +3.5V	80	66	65	65	62	dB	MIN



Electrical Performance Characteristics

(G= +2, R_F=887Ω, R_G=887Ω, and R_L=150Ω connected to V_S/2, unless otherwise noted. Typical values are at T_A =+25°C.)


PARAMETER	CONDITIONS	MA8051/52/54/51N/52N						
		TYP	MIN/MAX OVER TEMPERATURE					
		+25°C	+25°C	0°C to 70°C	-40°C to 85°C	-40°C to 125°C	UNITS	MIN/ MAX
OUTPUT CHARACTERISTICS								
Output Voltage Swing from Rail	R _L = 150Ω	0.12					V	TYP
	R _L = 1kΩ	0.03					V	TYP
Output Current		80	60				mA	MIN
Closed-Loop Output Impedance	f<100kHz	0.08					Ω	TYP
POWER-DOWN DISABLE								
(MA8051/2N only) Turn-On Time		236					ns	TYP
Turn-Off Time		52					ns	TYP
DISABLE Voltage-Off			0.8				V	MAX
DISABLE Voltage-On			2				V	MIN
POWER SUPPLY								
Operating Voltage Range			2.5	2.7	2.7	2.7	V	MIN
			5.5	5.5	5.5	5.5	V	MAX
Quiescent Current (per amplifier)		2.8	3.65				mA	MAX
Supply Current when Disabled per amplifier(MA8051/2N only)		50	70	85	100	137	µ A	MAX
Power Supply Rejection Ratio (PSRR)	ΔV _S = +2.7V to +5.5V, V _{CM} = (-V _S) +0.5	80	67	67	65	62	dB	MIN




Typical Performance characteristics

($V_s=+5V$, $G=+2$, $R_F=887\Omega$, $R_G=887\Omega$, and $R_L=150\Omega$ connected to $V_s/2$, unless otherwise noted. Typical values are at $T_A=+25^\circ C$.)


Non-Inverting Large-Signal Step Response

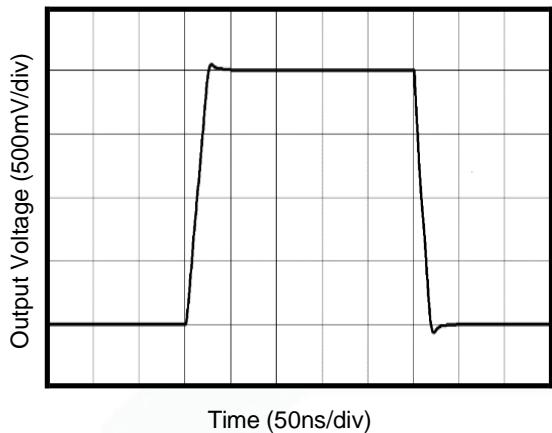


Non-Inverting Small-Signal Step Response

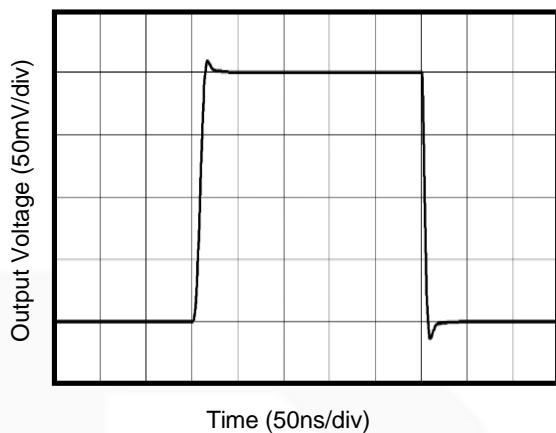


Supply Current vs. Temperature

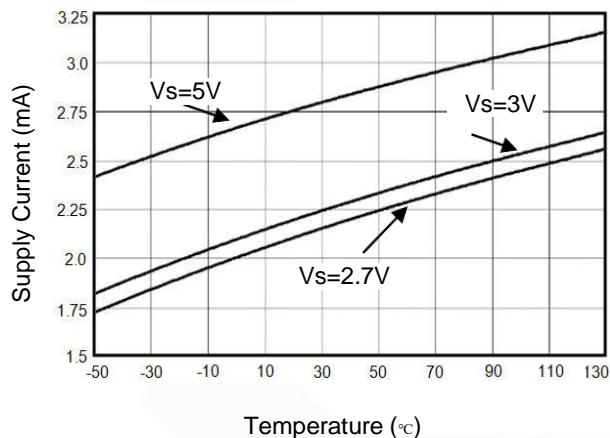


Sutdown Current vs. Temperature

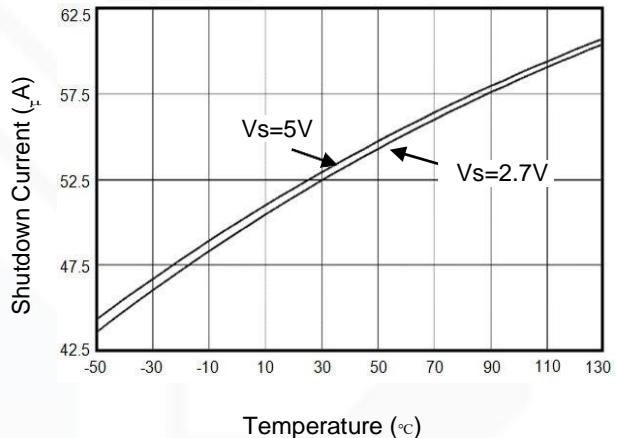

Output Voltage Swing vs. Output Current

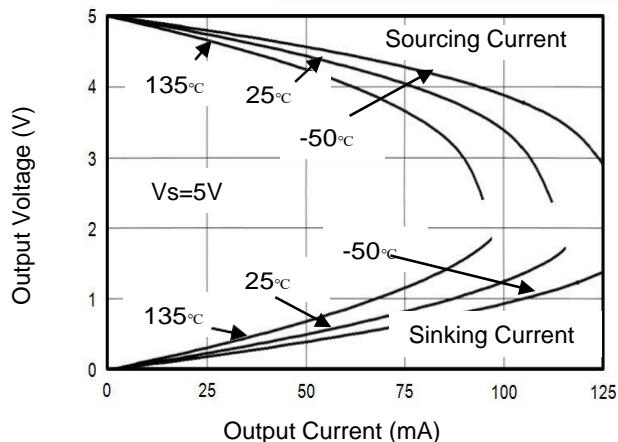

Output Voltage vs. Output Current

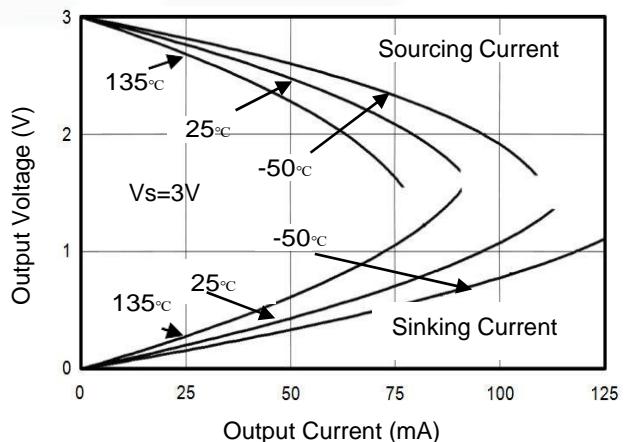





Typical Performance characteristics

((Vs=+5V, G= +2, RF=887Ω, RG=887Ω, and RL=150Ω connected to Vs/2, unless otherwise noted. Typical values are at TA =+25°C.)


Non-Inverting Small Signal Frequency Response

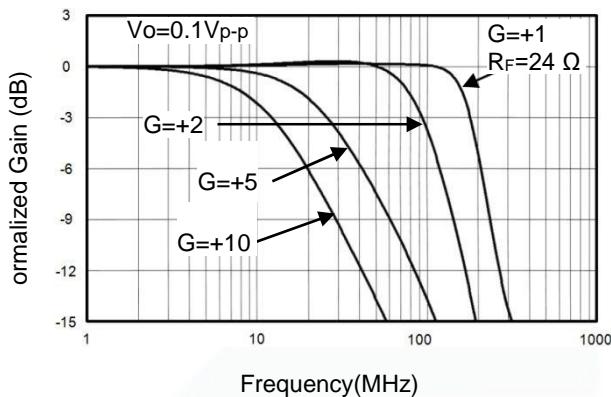


Inverting Small Signal Frequency Response

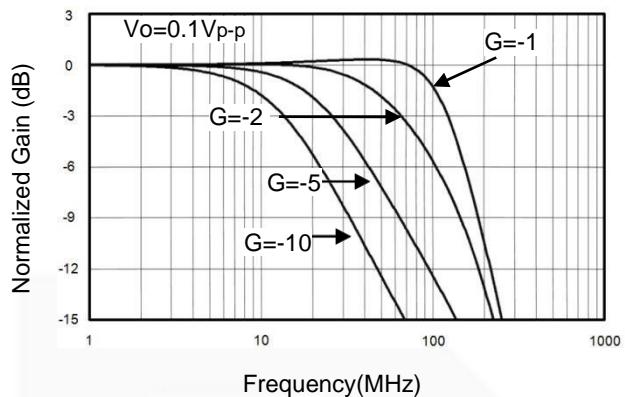


Frequency Response For Various RL

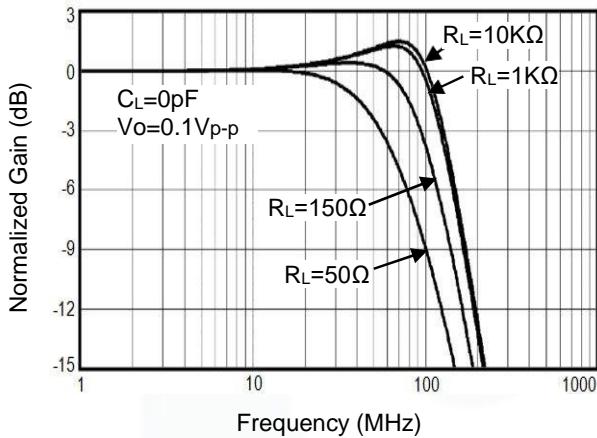


0.1dB Gain Flatness For Various RF

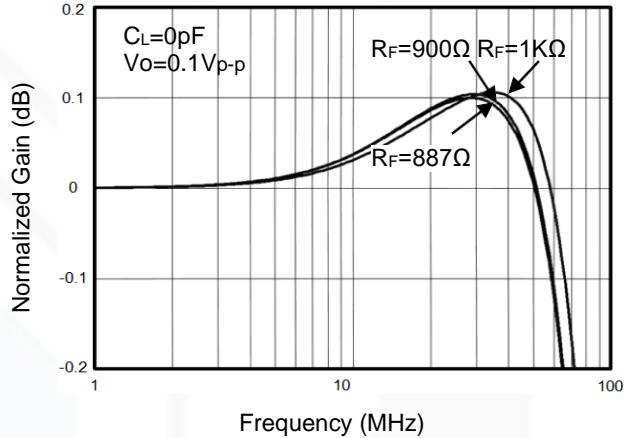

Frequency Response For Various CL

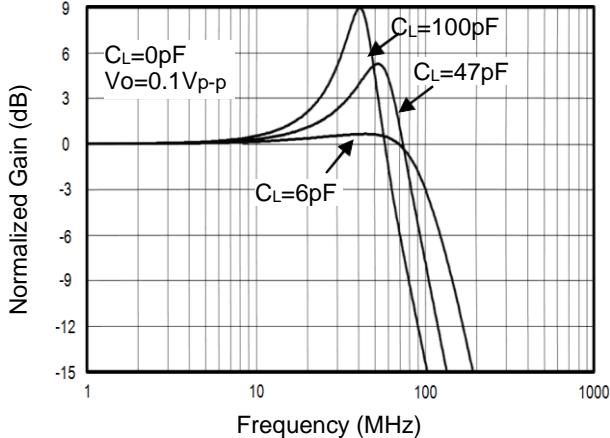

Frequency Response vs. Capacitive Load

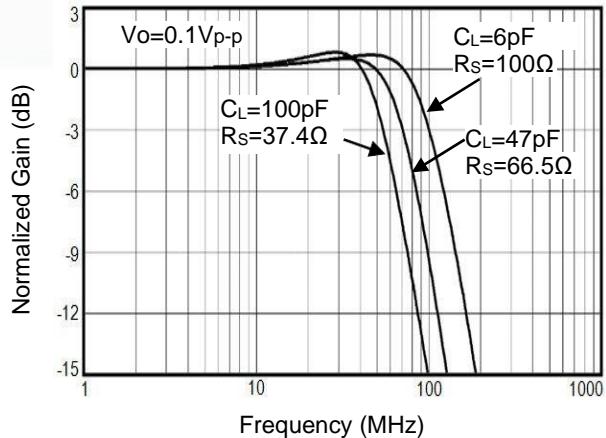





Typical Performance characteristics

($V_S=+5V$, $G=+2$, $R_F=887\Omega$, $R_G=887\Omega$, and $R_L=150\Omega$ connected to $V_S/2$, unless otherwise noted. Typical values are at $T_A = +25^\circ C$.)


Input Voltage Noise Spectral Density vs. Frequency

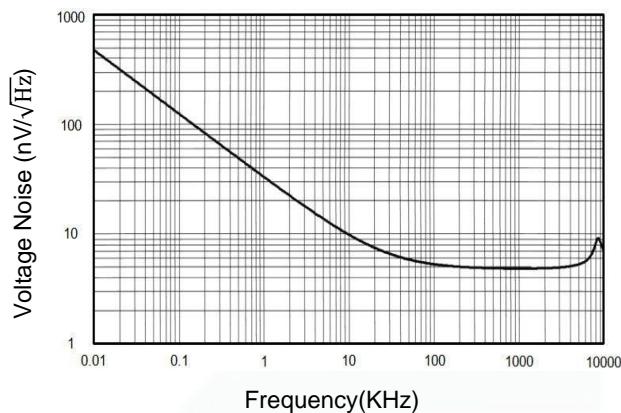


Overload Recovery Time

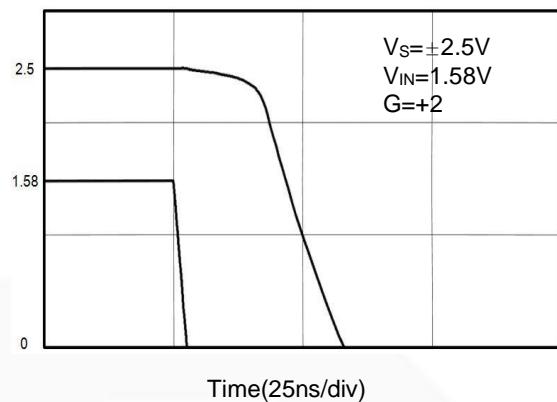

Large-Signal Disable/Enable Response

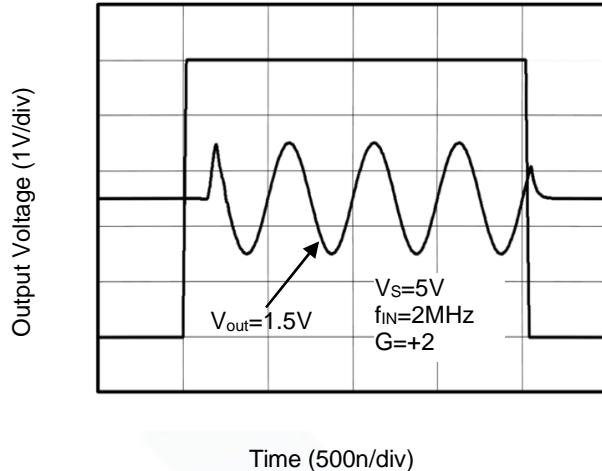

Closed-Loop Output Impedance vs Frequency

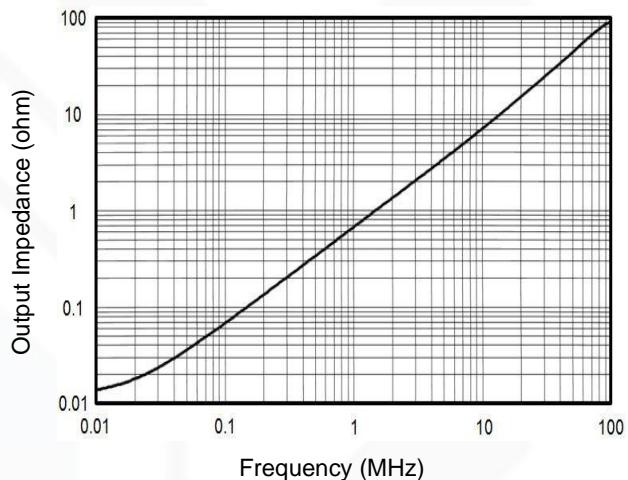



Application Note

Driving Capacitive Loads

MA805X series op amps are unity-gain stable and suitable for a wide range of general-purpose applications. The small footprints of the MA805X series packages save space on printed circuit boards and enable the design of smaller electronic products.

Power Supply Bypassing and Board Layout

MA805X series operates from a single 2.5V to 5.5V supply or dual $\pm 1.25V$ to $\pm 2.75V$ supplies. For best performance, a $0.1\mu F$ ceramic capacitor should be placed close to the V_{DD} pin in single supply operation. For dual supply operation, both V_{DD} and V_{SS} supplies should be bypassed to ground with separate $0.1\mu F$ ceramic capacitors.

Low Supply Current

The low supply current (typical 2.8mA per channel) of MA805X series will help to maximize battery life. They are ideal for battery powered systems.

Operating Voltage

MA805X series operate under wide input supply voltage (2.5V to 5.5V). In addition, all temperature specifications apply from $-40^{\circ}C$ to $+125^{\circ}C$. Most behavior remains unchanged throughout the full operating voltage range. These guarantees ensure operation throughout the single Li-Ion battery lifetime.

Rail-to-Rail Output

Rail-to-Rail output swing provides maximum possible dynamic range at the output. This is particularly important when operating in low supply voltages. The output voltage of MA805X series can typically swing to less than 8mV from supply rail in light resistive loads ($>1k\Omega$), and 30mV of supply rail in moderate resistive loads (150Ω).

Capacitive Load Tolerance

The MA805X family is optimized for bandwidth and speed, not for driving capacitive loads. Output capacitance will create a pole in the amplifier's feedback path, leading to excessive peaking and potential oscillation. If dealing with load capacitance is a requirement of the application, the two strategies to consider are (1) using a small resistor in series with the amplifier's output and the load capacitance and (2) reducing the bandwidth of the amplifier's feedback loop by increasing the overall noise gain. Figure 2. shows a unity gain follower using the series resistor strategy. The resistor isolates the output from the capacitance and, more importantly, creates a zero in the feedback path that compensates for the pole created by the output capacitance.

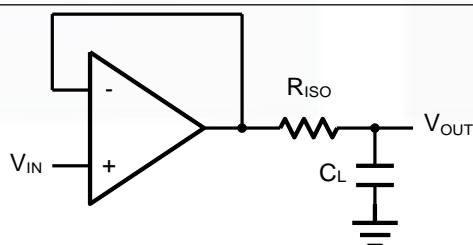


Figure 2. Indirectly Driving a Capacitive Load Using Isolation Resistor



The bigger the RISO resistor value, the more stable VOUT will be. However, if there is a resistive load RL in parallel with the capacitive load, a voltage divider (proportional to R_{ISO}/R_L) is formed, this will result in a gain error.

The circuit in Figure 3 is an improvement to the one in Figure 2. R_F provides the DC accuracy by feed-forward the V_{IN} to R_L. C_F and R_{ISO} serve to counteract the loss of phase margin by feeding the high frequency component of the output signal back to the amplifier's inverting input, thereby preserving the phase margin in the overall feedback loop. Capacitive drive can be increased by increasing the value of C_F. This in turn will slow down the pulse response.

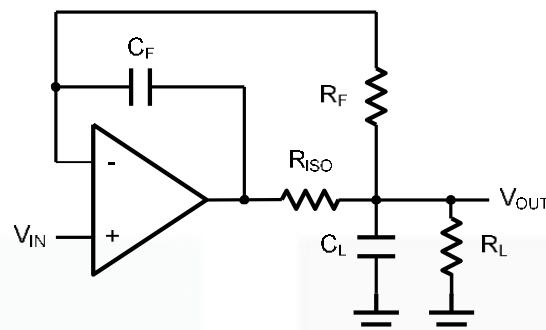


Figure 3. Indirectly Driving a Capacitive Load with DC Accuracy



Typical Application Circuits

Differential amplifier

The differential amplifier allows the subtraction of two input voltages or cancellation of a signal common to the two inputs. It is useful as a computational amplifier in making a differential to single-end conversion or in rejecting a common mode signal. Figure 4. shown the differential amplifier using MA805X.

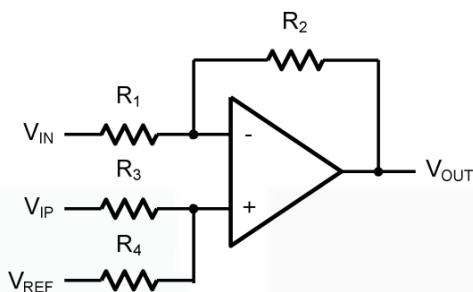


Figure 4. Differential Amplifier

$$V_{\text{OUT}} = \left(\frac{R_1+R_2}{R_3+R_4} \right) \frac{R_4}{R_1} V_{\text{IN}} - \frac{R_2}{R_1} V_{\text{IP}} + \left(\frac{R_1+R_2}{R_3+R_4} \right) \frac{R_3}{R_1} V_{\text{REF}}$$

If the resistor ratios are equal (i.e. $R_1=R_3$ and $R_2=R_4$), then

$$V_{\text{OUT}} = \frac{R_2}{R_1} (V_{\text{IN}} - V_{\text{IP}}) + V_{\text{REF}}$$

Low Pass Active Filter

The low pass active filter is shown in Figure 5. The DC gain is defined by $-R_2/R_1$. The filter has a -20dB/decade roll-off after its corner frequency $f_C = 1/(2\pi R_3 C_1)$.

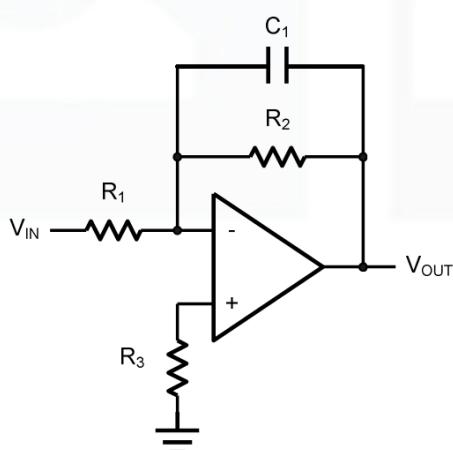


Figure 5. Low Pass Active Filter

**Driving Video**

The MA805X can be used in video applications like in Figure 6.


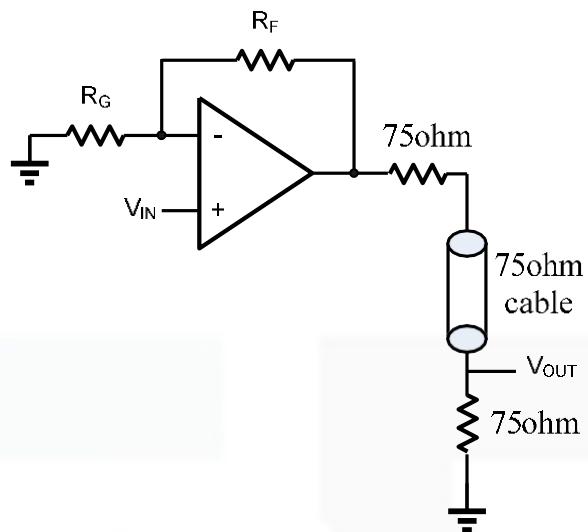


Figure 6. Typical video driving



Package Information

MSOP-8

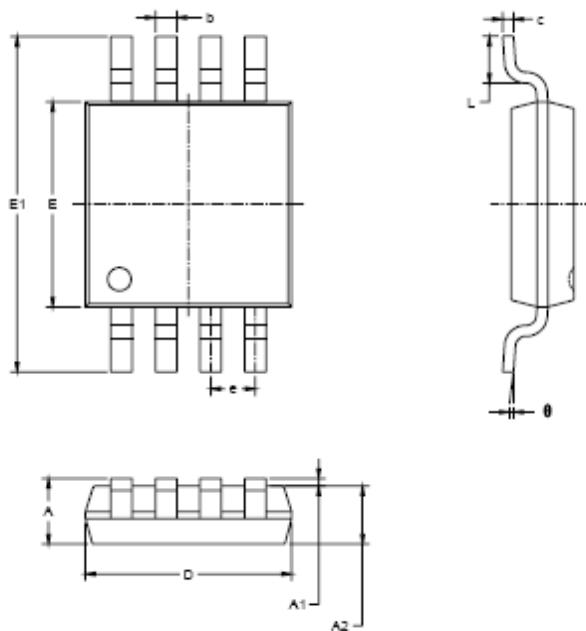


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.820	1.100	0.032	0.043
A1	0.020	0.150	0.001	0.006
A2	0.750	0.950	0.030	0.037
b	0.250	0.380	0.010	0.015
c	0.090	0.230	0.004	0.009
D	2.900	3.100	0.114	0.122
E	2.900	3.100	0.114	0.122
E1	4.750	5.050	0.187	0.199
e	0.650 BSC		0.026 BSC	
L	0.400	0.800	0.016	0.031
θ	0°	6°	0°	6°



MA8051/8052/8054/8051N/8052N

250MHz CMOS Rail-to-Rail Output Opamps

SOP-8

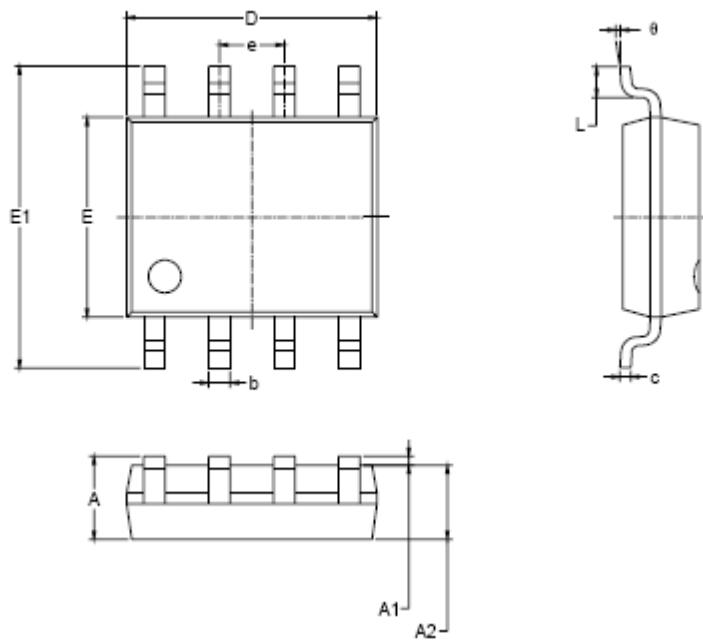


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.27 BSC		0.050 BSC	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°



MA8051/8052/8054/8051N/8052N


250MHz CMOS Rail-to-Rail Output Opamps

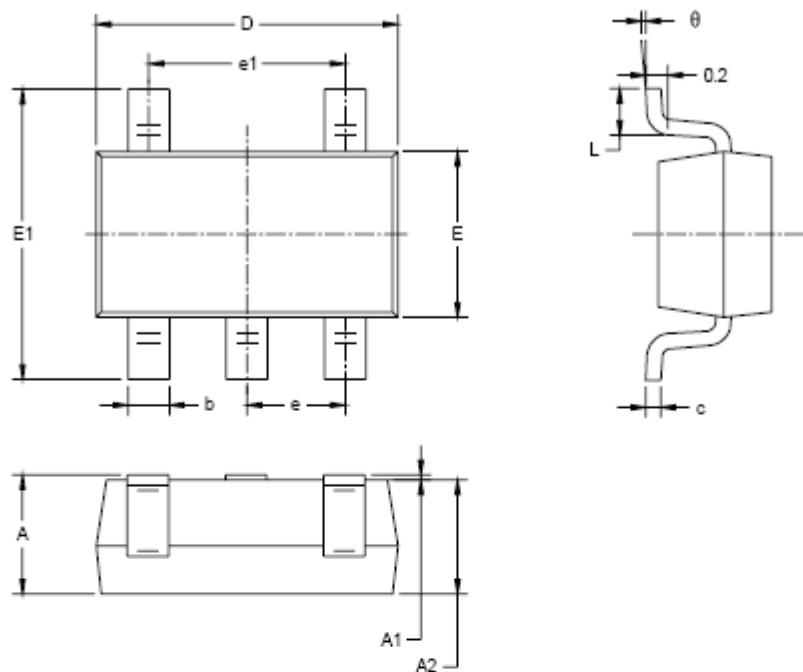

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950 BSC		0.037 BSC	
e1	1.000 BSC		0.075 BSC	
L	0.300	0.600	0.012	0.024
theta	0°	8°	0°	8°




SOT23-6

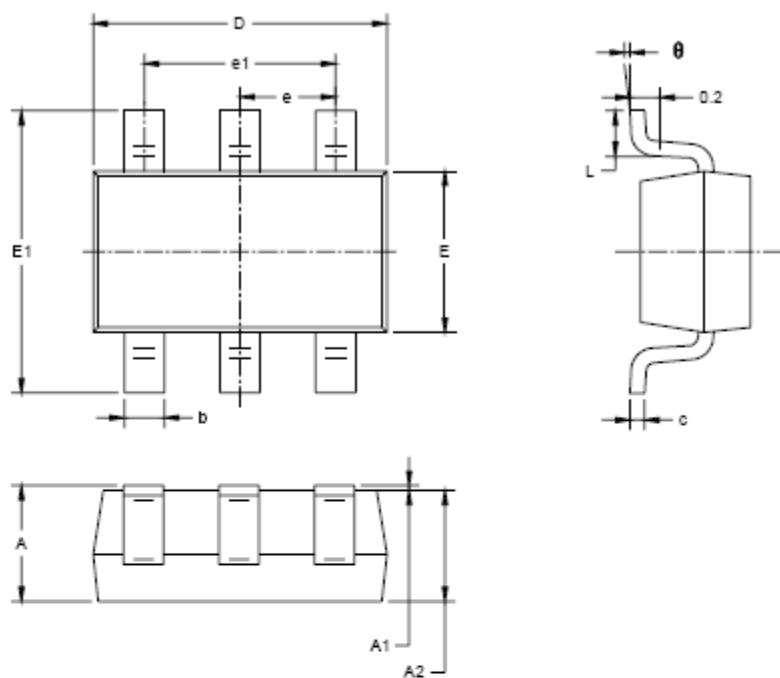

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.180	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950 BSC		0.037 BSC	
e1	1.900 BSC		0.075 BSC	
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°




MSOP-10

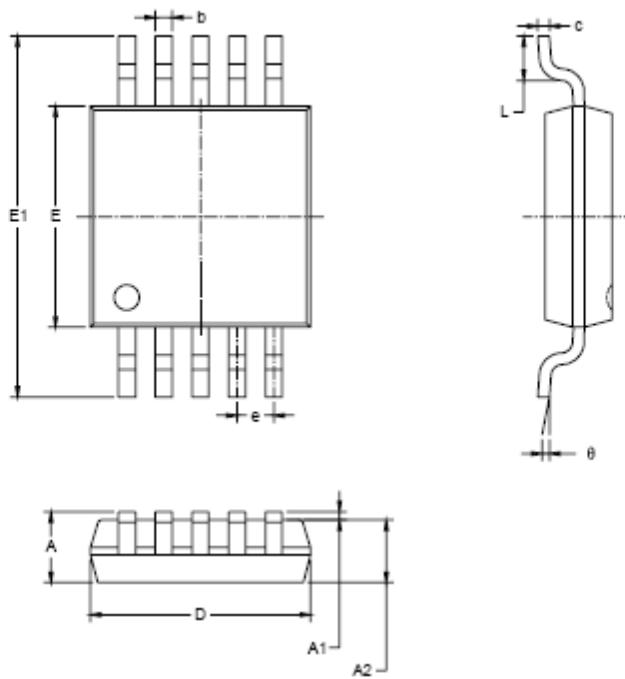

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.820	1.100	0.032	0.043
A1	0.020	0.150	0.001	0.006
A2	0.750	0.950	0.030	0.037
b	0.180	0.280	0.007	0.011
c	0.090	0.230	0.004	0.009
D	2.900	3.100	0.114	0.122
E	2.900	3.100	0.114	0.122
E1	4.750	5.050	0.187	0.199
e	0.500 BSC		0.020 BSC	
L	0.400	0.800	0.016	0.031
θ	0°	6°	0°	6°



SC70-5

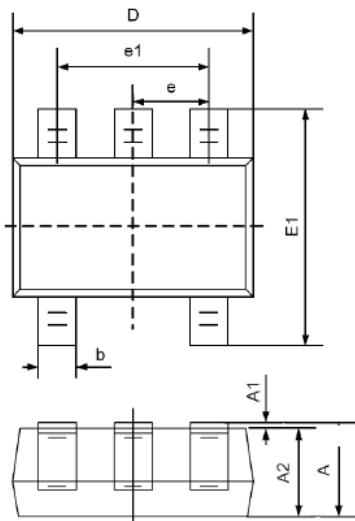



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.150	0.350	0.006	0.014
C	0.080	0.150	0.003	0.006
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.450	0.085	0.096
e	0.650TYP		0.026TYP	
e1	1.200	1.400	0.047	0.055
L	0.525REF		0.021REF	
L1	0.260	0.460	0.010	0.018
theta	0°	8°	0°	8°





MA8051/8052/8054/8051N/8052N

250MHz CMOS Rail-to-Rail Output Opamps

SOP-14

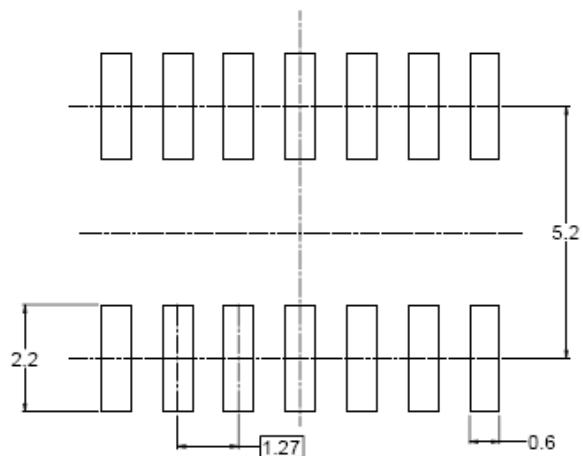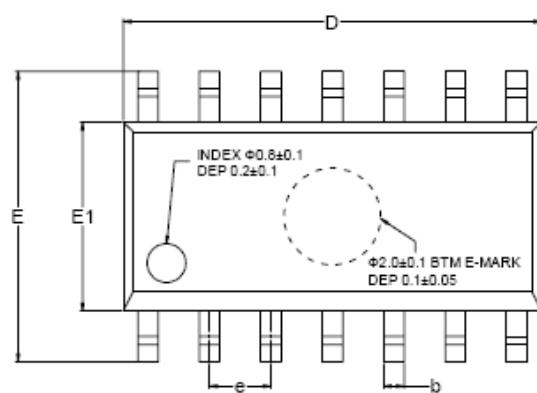


RECOMMENDED LAND PATTERN (Unit: mm)

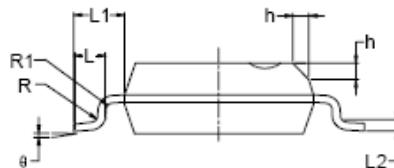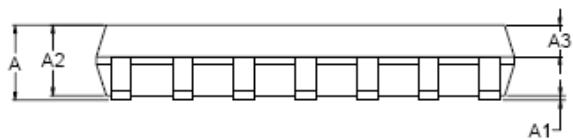

Symbol	Dimensions In Millimeters			Dimensions In Inches		
	MIN	MOD	MAX	MIN	MOD	MAX
A	1.35		1.75	0.053		0.069
A1	0.10		0.25	0.004		0.010
A2	1.25		1.65	0.049		0.065
A3	0.55		0.75	0.022		0.030
b	0.36		0.49	0.014		0.019
D	8.53		8.73	0.336		0.344
E	5.80		6.20	0.228		0.244
E1	3.80		4.00	0.150		0.157
e	1.27 BSC			0.050 BSC		
L	0.45		0.80	0.018		0.032
L1	1.04 REF			0.040 REF		
L2	0.25 BSC			0.01 BSC		
R	0.07			0.003		
R1	0.07			0.003		
h	0.30		0.50	0.012		0.020
θ	0°		8°	0°		8°




TSSOP-14

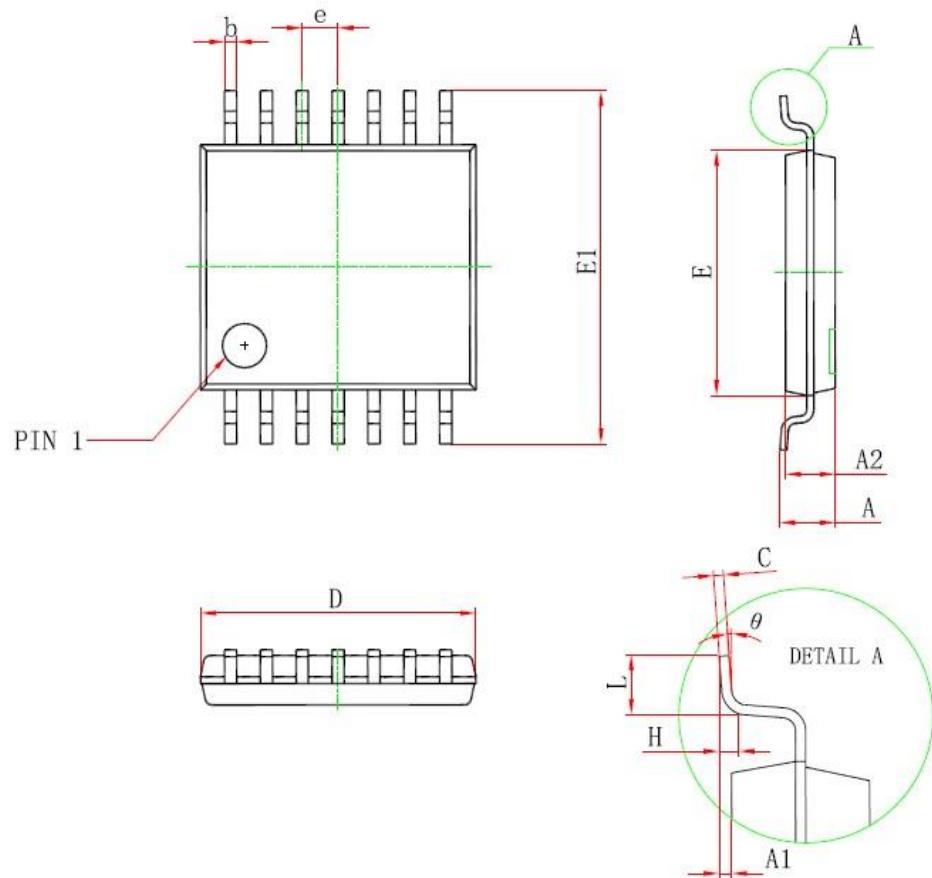


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
D	4.900	5.100	0.193	0.201
E	4.300	4.500	0.169	0.177
b	0.190	0.300	0.007	0.012
c	0.090	0.200	0.004	0.008
E1	6.250	6.550	0.246	0.258
A		1.200		0.047
A2	0.800	1.000	0.031	0.039
A1	0.050	0.150	0.002	0.006
e	0.65 (BSC)		0.026 (BSC)	
L	0.500	0.700	0.020	0.028
H	0.25(TYP)		0.01(TYP)	
θ	1°	7°	1°	7°




DFN-8

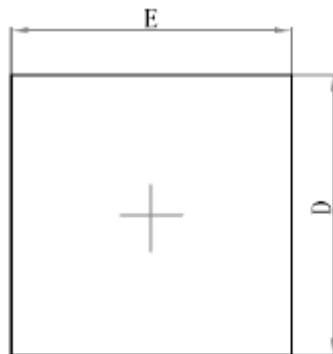

Top View

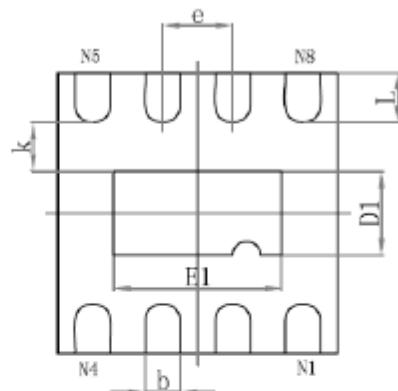

Bottom View

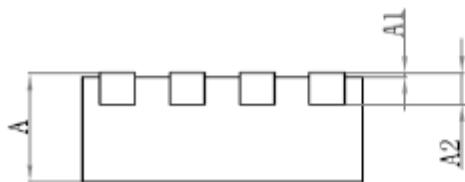


Side View

Symbol	Dimensions In Millimeters			Dimensions In Inches		
	Min	Nom	Max	Min	Nom	Max
A	0.80	0.85	0.9	0.031	0.033	0.035
A1	0.00	0.02	0.05	0.000	0.001	0.002
A2	0.153	0.203	0.253	0.006	0.008	0.010
b	0.18	0.24	0.30	0.007	0.009	0.012
D	1.9	2.0	2.1	0.075	0.079	0.083
E	1.9	2.0	2.1	0.075	0.079	0.083
D1	0.5	0.6	0.7	0.020	0.024	0.028
E1	1.1	1.2	1.3	0.043	0.047	0.051
e		0.50			0.20	
k	0.2			0.008		
L	0.25	0.35	0.45	0.010	0.014	0.018



SC70-6

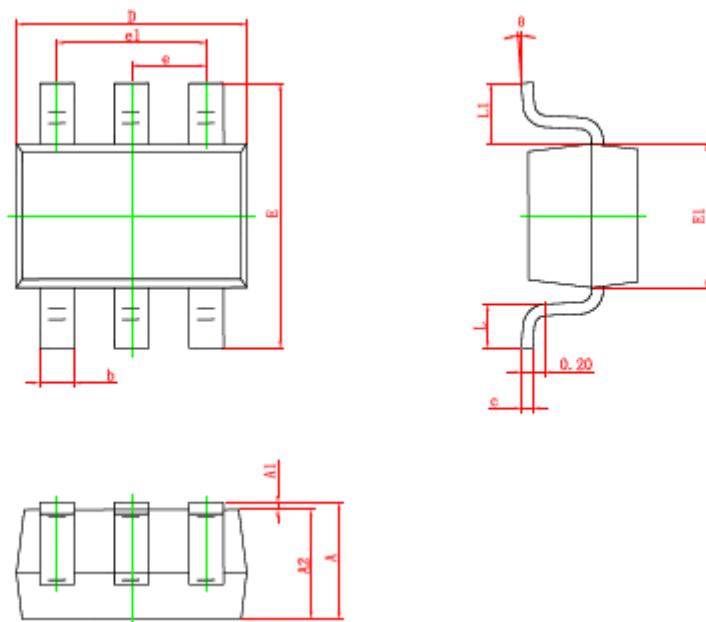

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.150	0.350	0.006	0.014
c	0.080	0.150	0.003	0.006
D	2.000	2.200	0.079	0.087
E	2.150	2.450	0.085	0.096
E1	1.150	1.350	0.045	0.053
e	0.650 TYP.		0.026 TYP.	
e1	1.200	1.400	0.047	0.055
L	0.260	0.460	0.010	0.018
L1	0.525 REF.		0.021 REF.	
theta	0°	8°	0°	8°



MA8051/8052/8054/8051N/8052N

250MHz CMOS Rail-to-Rail Output Opamps



CBC Microelectronics Co.,Ltd

<http://www.cbcv.net>

IMPORTANT NOTICE

CBC Microelectronics Co., Ltd reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein or to discontinue any product or service. Customers should obtain the latest relevant information before placing orders and should verify the latest and complete information. CBC Microelectronics does not assume any responsibility for use of any product, nor does CBC Microelectronics assume any liability arising out of the application or use of this document or any product or circuit described herein. CBC Microelectronics assumes no liability for applications assistance or the design of Customers' products. Customers are responsible for their products and applications using CBC Microelectronics components. CBC Microelectronics does not convey any license under its patent or trademark rights nor the other rights.

CBC Microelectronics Co., Ltd © 2004-2021.